


ECOJoint


- Quick&Easy
- Safe&Economical
- Minimum Downtime
- No damage to products
- Recyclable & Degradable materials
- Adhesive-Free connection

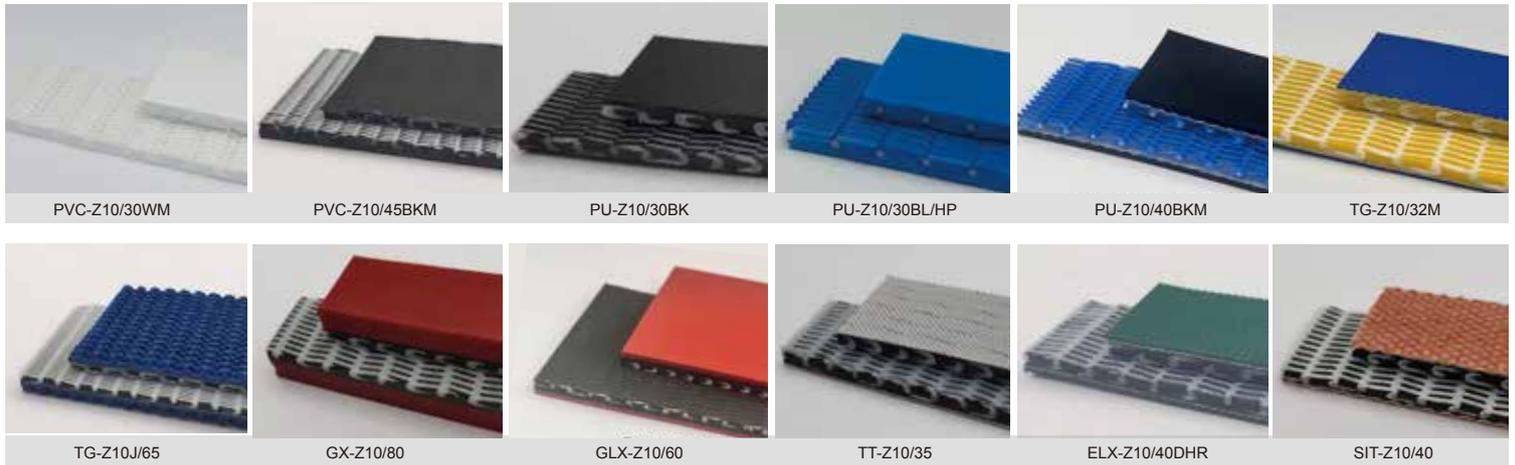

Technical Data:

ECOJoint	T	Min Pulley	Weight	K 1%	Working Temp	Application	Color
	(mm)	(mm)	(kg/m ²)	(N/mm)	°C		
PVC-Z10/30WM	3.0	50	3.9	10	-15/80	logistics	white/white
PVC-Z10/35BKM	3.5	50	4.0	10	-15/80	logistics	black/white
PVC-Z10/45BKM	4.5	60	5.3	10	-15/80	logistics	black/white
PU-Z10/30BK	3.1	50	4.1	10	-20/90	logistics	black/black
PU-Z10/30BL/HP	3.0	80	3.5	10	-35/100	logistics	blue/blue
PU-Z10/40BKM	4.0	60	5.1	10	-20/90	logistics	black/blue
TG-Z10/32M	3.2	50	4.2	10	-18/121	corrugate & paper	blue/yellow
TG-Z10J/65	6.3	75	5.8	10	-18/121	corrugate & paper	blue/white
GX-Z10/60	6.0	70	7.2	10	-40/121	paper	red/white
GX-Z10/80	8.0	100	9.2	10	-40/121	paper	red/white
GLX-Z10/60	6.5	80	7.2	10	-40/121	paper	red/black
TT-Z10/35	3.6	65	4.4	10	-40/121	corrugate & paper	white/black
TT-Z10/40	4.0	80	4.6	10	-40/121	corrugate & paper	white/black
ELX-Z10/40DHR	4.0	80	5.0	10	-15/80	corrugate & paper	green/black
SIT-Z10/40	4.0	80	4.4	10	-40/180	tyre	orange/black

ECOJoint Process:

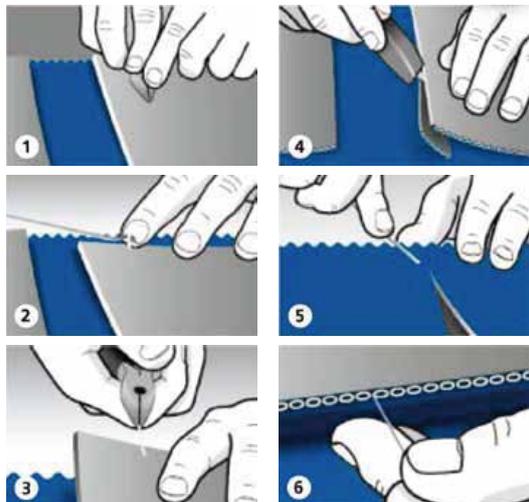

Belt Tensioning rate 1%-2%



Tools

